


ROOF TILES

Tile Range

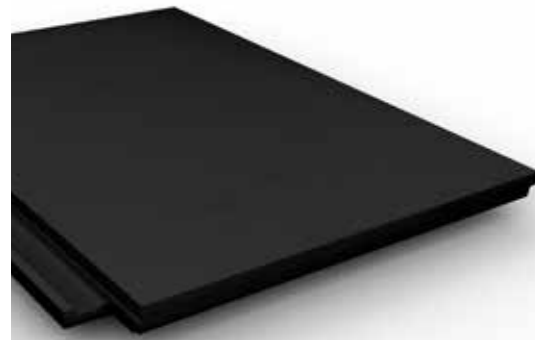

ROOF ACCESSORIES

Multi Ridge Tiles

Multi Ridge
457mm x 250mm
Weight
5kg
Maximum Roof Pitch
45°



COLOURS

Available in 5 Colours



Grey




Brown



Rustic Red



Anthracite



Terracotta



**15 YEAR
FULL ROOF
GUARANTEE**



GET IN TOUCH

Speak to an Expert

Jonathan Pratt
National Roof Tile Manager
Roofing Division
Phone: 07740 433860
Email: JPratt@fpmccann.co.uk

Dominic Hiscock
Sales & Specification Manager
South West, Roofing Division
Phone: 07843 801620
Email: DHiscock@fpmccann.co.uk

Jessica Brooke
Sales & Specification Manager
North West, Roofing Division
Phone: 07976 773954
Email: JBrooke@fpmccann.co.uk

Anwar Qadri
Sales & Specification Manager
South East, Roofing Division
Phone: 07540 201284
Email: AQadri@fpmccann.co.uk

Kelsey Buckley
Sales & Specification Manager
North East, Roofing Division
Phone: 07752 796952
Email: KBuckley@fpmccann.co.uk

Laurie Robertson
Sales & Specification Manager
Scotland, Roofing Division
Phone: 07583 783595
Email: LRobertson@fpmccann.co.uk

Cadeby Factory

Brascote Lane,
Cadeby,
Nuneaton,
Leicestershire,
CV13 0BB



Thin Flat Tile

Size	Thickness
420mm x 334mm	19.5mm
Weight	Minimum Headlap*
4.7kg	75mm (normal exposure)
Minimum Pitch*	Maximum Gauge
100mm headlap - 17.5°	345mm
75mm headlap - 22.5°	
Cover Width	Covering Capacity
305mm	75mm headlap - 9.7 tiles/m ²
Weight of Tiling	Nail Size
75mm headlap - 45kg/m ²	40mm x 3.35mm
100mm headlap - 49kg/m ²	Aluminium Alloy
Batten Size	Tiles per Pallet
50 x 25mm (rafters not exceeding 600mm c/c)	228
Tiles per Band	Weight of Pallet
38	1086kg

Duo Thin Flat Tile

Size	Thickness
420mm x 334mm	19.5mm
Weight	Minimum Headlap*
4.7kg	75mm (normal exposure)
Minimum Pitch*	Maximum Gauge
100mm headlap - 17.5°	345mm
75mm headlap - 22.5°	
Cover Width	Covering Capacity
305mm	75mm headlap - 9.7 tiles/m ²
Weight of Tiling	Nail Size
75mm headlap - 45kg/m ²	40mm x 3.35mm
100mm headlap - 49kg/m ²	Aluminium Alloy
Batten Size	Tiles per Pallet
50 x 25mm (rafters not exceeding 600mm c/c)	228
Tiles per Band	Weight of Pallet
38	1086kg

Seawave Tile

Size	Thickness
420mm x 334mm	26mm
Weight	Minimum Headlap
4.5kg	75mm
Minimum Pitch	Maximum Gauge
75mm headlap - 17.5°	345mm
Cover Width	Covering Capacity
305mm	75mm headlap - 9.8 tiles/m ²
Weight of Tiling	Nail Size
75mm headlap - 47kg/m ²	40mm x 3.35mm
100mm headlap - 51kg/m ²	Aluminium Alloy
Batten Size	Tiles per Pallet
50 x 25mm (rafters not exceeding 600mm c/c)	210
Tiles per Band	Weight of Pallet
35	960kg

VENTILATION PRODUCTS

Underlay



FP McCann 150gsm Vapour Permeable Membrane

High performance breather membrane
3 layer membrane
Suited for all wind zones
Tested to BS5534:2014 +A2:2018
wind loading
Supplied via partnership with Permavent



Eaves Vent System 6m



Roll Out Rafter Eave Vent
300mm x 6m

Over Fascia Ventilator
10mm or 25mm x6

Felt Support Tray
x10

The Eaves Vent System 6m is available as either a 2 part or 3 part system providing a 10mm or 25mm ventilation gap.

McCannVent

Recommended Tile Spacing
5mm gap - 2m centres
10mm gap - 1m centres



Free ventilation area
10,000mm²

Profiles Available
Thin Flat
and Seawave

FIXINGS AND CLIPS

Tile Fixings



2-1 Clip



Thin Flat
Verge Clip



Seawave
Verge Clip



Batten End Clip



Batten Holder

DRY FIX SYSTEMS

McCannFast Ridge 6m



McCannFast Ridge
Roll 6m Ventilated
or Unventilated
100mm x M5 S/S
Screw x10

McCannFast Ridge
Union x10

McCannFast Union
Clip x10

Ridge Batten
Connector x10

McCannFast Hip 6m



McCannFast Hip
Roll 6m Unventilated
125mm x M5 S/S
Screw x10

McCannFast Hip
Union x10

McCannFast Union
Clip x10

Hip Batten
Connector x10

Filon Products Dry Fix Valley System



Eaves Closure Piece

Top Closure Piece 90°

GRP Dry Fix Valley Trough 3m

Minimum Pitch: As per tile profile Maximum Pitch: 60°

All components available with a 70mm or 110mm upstand

Dry Verge System



Dry Verge Unit



Multi
Ridge End Cap