

DMS1B2/6060/K


Safeseal B125 manhole cover 600mm x 600mm clear opening with 40mm frame depth



| RANGE | OVERALL FRAME | CLEAR OPENING | FRAME DEPTH | BASE OPENING |
|----------|-----------------|-----------------|-------------|-----------------|
| | (A X B) | (C X D) | (E) | (F X G) |
| Safeseal | 690 mm x 690 mm | 600 mm x 600 mm | 40 mm | 635 mm x 635 mm |

Key features

- Indexed covers ensure correct fit first time, every time.
- Safety keyway prevents accidental disengagement of the lifting key during the handling process.
- Labyrinth seal helps to prevent odour escapes and water ingress.
- 70+PSRV tested at top surface of chequer by UKAS accredited 3rd party.

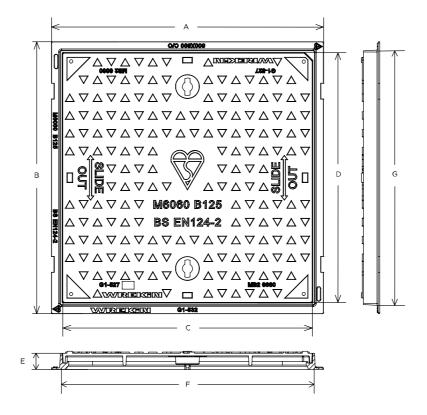





General information

| Stock code | DMS1B2/6060/K |
|------------------|---------------|
| Primary material | Ductile iron |
| Range | Safeseal |
| Category | Manhole cover |
| Flanges | 4 |

Standards, classes and groupings

| Standards | BS EN 124 |
|-----------------------|-----------|
| BS EN 124 Class | B125 |
| BS EN 124 Group | 2 |
| Third party certified | Kitemark |

Dimensions

| Frame shape | Square |
|--------------------------|--------|
| Manhole shape | Square |
| Overall frame length (A) | 690 mm |
| Overall frame width (B) | 690 mm |
| Clear opening length (C) | 600 mm |
| Clear opening width (D) | 600 mm |
| Frame depth (E) | 40 mm |
| Base opening length (F) | 635 mm |



Tel: 01543 440 440 wrekinproducts.com



Base opening width (G)

635 mm

Notes

All values stated are nominal within 2.5% tolerance.

Accessories

| STOCK CODE | PRODUCT NAME | DESCRIPTION | |
|--------------------|---------------|--|--|
| PC/UNIFORM/151076 | UniForm | UniForm chamber adjustment unit 760mm x 100mm x 15mm | |
| PC/UNIFORM/151576 | UniForm | UniForm chamber adjustment unit 760mm x 150mm x 15mm | |
| PC/UNIFORM/251076 | UniForm | UniForm chamber adjustment unit 760mm x 100mm x 25mm | |
| PC/UNIFORM/251576 | UniForm | UniForm chamber adjustment unit 760mm x 150mm x 25mm | |
| PC/UNIFORM/451076 | UniForm | UniForm chamber adjustment unit 760mm x 100mm x 45mm | |
| PC/UNIFORM/451576 | UniForm | UniForm chamber adjustment unit 760mm x 150mm x 45mm | |
| PC/UNIWEDGE/755012 | UniForm | UniForm support wedge 120mm x 50mm x 75mm | |
| YPCR/U12.5 | UniPak Mortar | 12.5Kg UniPak rapid curing polyester resin mortar | |
| YPCR/U25 | UniPak Mortar | 25Kg UniPak rapid curing polyester resin mortar | |

1. Wrekin Products Ltd is continually seeking to improve our products and therefore reserves the right to alter product specifications without prior notice.

- 2. It is the responsibility of all users to satisfy themselves the above data is current.
- 3. Installation details are available on request.





Tel: 01543 440 440 wrekinproducts.com







Tel: 01543 440 440
wrekinproducts.com